


GAZ-LI03 Heavy Duty Moly Chain Oil



Product Description:

GAZ - LI03 is manufactured from a high quality medium VI solvent extracted naphthenic base oil fortified with molybdenum disulfide and a tackiness agent to impart maximum anti-wear and clinging characteristics.

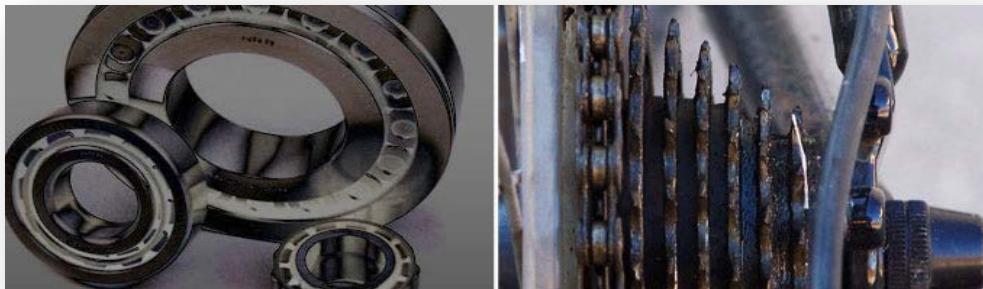

Applications / Features:

- Recommended for lubrication of chains, rollers, and conveyors in industrial plants, contractors equipment, and agricultural equipment.
- Recommended for slow speed heavy loaded journal bearings, slides, ways, crossheads and sprockets.
- Chain saw bar and chain lubricant.
- Economical – tackiness agent reduces oil consumption.
- Friction modifier (Moly) reduces wear.
- Tackiness agent reduces journal bearing and leakage.
- Reduces inventory – one oil for many uses.

Typical Properties:

GRADE, ISO	68	100	220
GRAVITY, °API	24.4	24.3	27.6
FLASH POINT, °F	440	450	485
FIRE POINT, °F	485	495	535
POUR POINT, °F	-10	-10	5
VISCOSITY:			
SUS @ 100°F	340	527	1165
SUS @ 210°F	52	59	95
cST @ 40°C.	68	100	220
cST @ 100°C.	7.6	9.6	18.6
COLOR, D-1500	GREY	GREY	GREY